




CONSTRUCTION ADHESIVE



Bonds Together Medium to Large Surfaces, both Indoor and Outdoor

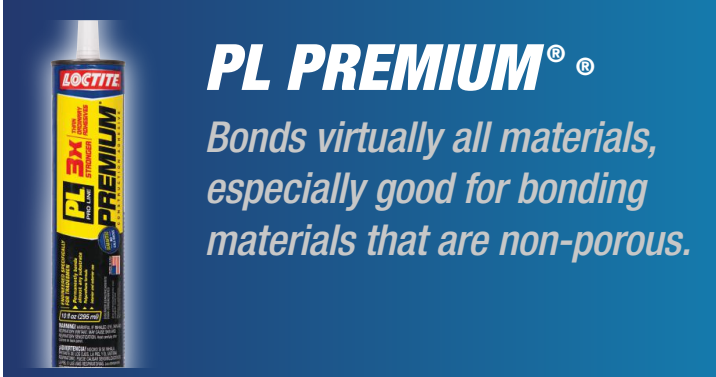

PL PREMIUM®

Bonds virtually all materials, especially good for bonding materials that are non-porous.

- *Allows for super-strong bonds with practically all building materials*
- *Recommended for sub-floors and construction joints*
- *Water and weather resistant*
- *Sets in 30 minutes; Cures fully in 24 hours*
- *Meets ASTM, HUD and APA specifications as well as state and national VOC guidelines*
- *Polyurethane-based*
- *Waterproof, paintable*
- *Available in cases of 12 tubes*

PREPARATION



Clean and dry surfaces, ensure they are free from grease, dust, oil, wax and paint. Lightly roughen up or sand the surfaces to be bonded. Remember to protect the work surface.

Temperature of adhesive and surfaces to be bonded must be above 40°F for polyurethane formula.

APPLICATION



Apply around the perimeter, then in an s-shape on the interior. Repositionable up to 15 minutes.

REMOVAL FROM SKIN, FABRIC & SURFACES



Immediately clean tools and sealant residue before curing. Cured sealant may be carefully cut away with a sharp-edged tool.